

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 176 849 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
30.01.2002 Bulletin 2002/05

(51) Int Cl.7: **H05B 33/08, G03B 15/03**

(21) Application number: 01306288.0

(22) Date of filing: 23.07.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(71) Applicant: **Fuji Photo Film Co., Ltd.**  
**Kanagawa-ken (JP)**

(72) Inventor: **Kawakami, Chikuni**  
**Asaka-shi, Saitama (JP)**


(30) Priority: 25.07.2000 JP 2000223505  
11.07.2001 JP 2001210598

(74) Representative: **Stevens, Jason Paul et al**  
**Frank B. Dehn & Co. 179 Queen Victoria Street**  
**London EC4V 4EL (GB)**

(54) **Electronic flash, electronic camera and light emitting head**

(57) R, G and B LEDs (38R, 38G and 38B) are used as a light source of an electronic flash. Electric energy is supplied to a capacitor (44) to the LEDs (38R, 38G and 38B). A system controller (52) controls light emitting amounts of the LEDs (38R, 38G and 38B) so that a color

temperature of the electronic flash light becomes a color temperature that has been manually set with a color temperature setting switch (28) or a color temperature of a light source determined by color temperature sensors (24).

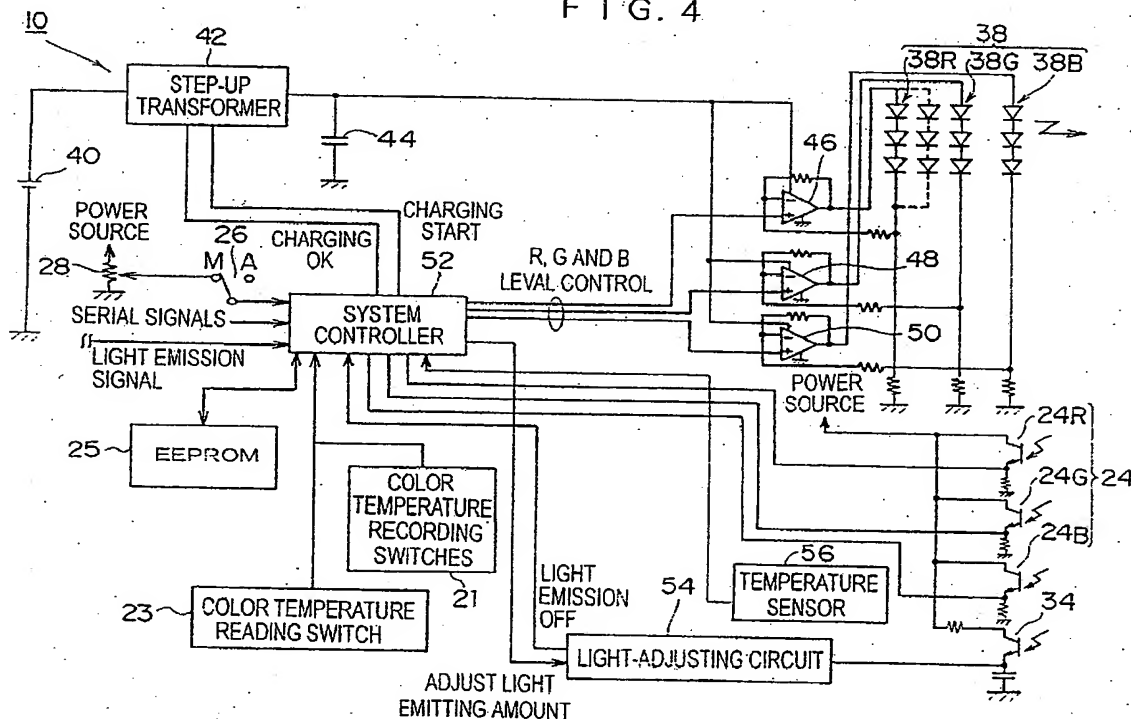**FIG. 4**

## Description

### BACKGROUND OF THE INVENTION

#### Field of the Invention

[0001] The present invention relates generally to an electronic flash, an electronic camera, and a light emitting head. The present invention relates more particularly to an electronic flash using light-emitting devices such as light emitting diodes (LEDs), an electronic camera and a light emitting head.

#### Description of the Related Art

[0002] An electronic flash of a camera has a xenon tube as a light source.

[0003] There have been high-luminance LEDs that emit red, green, amber, yellow, and milky-white lights, and a high-luminance blue LEDs has been used. These LEDs are mainly used as indicators of various apparatuses.

[0004] However, when an electronic flash is used to perform back light correction for the sun light in the morning or evening, the colors of the picture can be unnatural since the spectral characteristics of the xenon tube are close to those of the daylight. Also, the electronic flash with the xenon tube can emit the light for only a few milliseconds; and it can not be used for slow shutter speeds.

### SUMMARY OF THE INVENTION

[0005] In view of the foregoing, it is an object of the present invention to provide a new electronic flash of a camera using LEDs.

[0006] It is an object of the present invention to provide an electronic flash of a camera and an electronic camera that manually or automatically changes a color temperature of an electronic flash light to prevent unnatural colors of a picture.

[0007] It is an object of the present invention to provide a light emitting head that can be applied to an electronic flash with light emitting devices such as LEDs.

[0008] To achieve the above-mentioned object, the present invention is directed to an electronic flash of a camera, comprising: an electronic flash light source comprising a light emitting diode; and a light emission control device that makes the electronic flash light source emit light by supplying electric energy to the light emitting diode.

[0009] The electronic flash light source preferably comprises R, G and B light emitting diodes.

[0010] Preferably, the electronic flash further comprises a color temperature setting device that manually sets a color temperature of the light emitted from the electronic flash light source, wherein the light emission control device controls ratios between light emission

amounts of the R, G and B light emitting diodes so that a color temperature of the light emitted from the electronic flash light source becomes the color temperature set by the color temperature setting device.

[0011] Preferably, the electronic flash further comprises a color temperature determining device that determines a color temperature of subject light, wherein the light emission control device controls ratios between light emission amounts of the R, G and B light emitting diodes so that a color temperature of the light emitted from the electronic flash light source becomes the color temperature determined by the color temperature determining device. Thus, the color temperature of the electronic flash light can be automatically controlled to that of the subject light, and this can prevent unnatural colors of the picture.

[0012] Preferably, the electronic flash further comprises a capacitor with a large capacity that is charged by a battery, wherein the light emission control device supplies the electric energy from the capacitor to the light emitting diode. Thus, the electric energy can be obtained with the small battery. In addition, fall of the voltage of the battery can be prevented at the light emission, and misoperation of the other circuits can be prevented.

[0013] Preferably, the electronic flash further comprises a temperature sensor that determines a peripheral temperature of the light emitting diode, wherein the light emission control device controls the electric energy to obtain a desired light emission amount according to the peripheral temperature determined by the temperature sensor. Though the light emitting diodes change the light emitting amounts due to their peripheral temperature, the desired light emission amount can still be obtained.

[0014] To achieve the above-mentioned object, the present invention is directed to an electronic flash of a camera, comprising: an electronic flash light source that emits electronic flash light; and an adjusting device that adjust a color temperature of the electronic flash light emitted from the electronic flash light source.

[0015] Preferably, the adjusting device comprises a color temperature setting device that manually sets a color temperature of the electronic flash light; and a light emission control device that controls a color temperature of the electronic flash light to the color temperature set by the color temperature setting device.

[0016] Preferably, the adjusting device comprises a color temperature determining device that determines a color temperature of subject light; and a light emission control device that controls a color temperature of the electronic flash light to the color temperature determined by the color temperature determining device.

[0017] Preferably, the color temperature determining device has determining devices that convert color components of the subject light into electric signals and determines the color temperature of the subject light according to a ratio between determination signals of the determining devices. The determining devices may be red and blue determining devices or red, green and blue

determining devices.

**[0018]** The color temperature determining device can determine the color temperature of the light source according to color image signals of a subject image captured by imaging devices of the camera. The imaging devices of the camera can be also used as a part of the color temperature determining device.

**[0019]** Preferably, the electronic flash light source is R, G and B light emitting devices and light emitting amounts from the R, G and B light emitting devices can be separately controlled. The R, G and B light emitting devices can be light emitting diodes, organic electroluminescences or plasma light emitting devices.

**[0020]** Preferably, the electronic flash further comprises a capacitor with a large capacity that is charged by a battery, and the adjusting device supplies the electric energy from the capacitor to the light emitting devices.

**[0021]** Preferably, the electronic flash further comprises a temperature sensor that determines a peripheral temperature of the light emitting diodes, and the adjusting device controls the electric energy to obtain a desired light emission amount according to the peripheral temperature determined by the temperature sensor.

**[0022]** Preferably, the adjusting device adjusts the color temperature of the electronic flash light by controlling a ratio between the light emitting amounts from the R, G and B light emitting devices.

**[0023]** The adjusting device can control the ratio between the light emitting amounts from the R, G and B light emitting devices by separately turning on and off the R, G and B light emitting devices.

**[0024]** Preferably, the adjusting device comprises a light adjusting sensor that determines one of an amount of reflected light from a subject emitted from one of the R, G and B light emitting devices of which light emitting amount is smallest among the R, G and B light emitting devices and an amount of reflected light from the subject emitted from the R, G and B light emitting devices; a first light emission controlling device that stops light emission of the one of the R, G and B light emitting devices when the one of the amounts determined by the light adjusting sensor reaches a predetermined reference value according to the ratios between the light emitting amounts from the R, G and B light emitting devices; a measuring device that measures a light emitting time of the one of the R, G and B light emitting devices; a calculating device that calculates light emitting times of others of the R, G and B light emitting devices according to the light emitting time measured by the measuring device and the ratios between the light emitting amounts from the R, G and B light emitting devices; and a second light emission controlling device that stops light emission of the others of the R, G and B light emitting devices according to the light emitting times calculated by the calculating device. The light emitting amount (light emitting time) of the light emitting devices with the smallest light emitting amount is controlled according to the amount determined by the light adjusting sensor. The

light emitting times of the other light emitting devices are calculated according to the light emitting time and the ratio between the light emitting amounts from the R, G and B light emitting devices.

**[0025]** Preferably, the adjusting device comprises a device that turns on and off the R, G and B light emitting devices with duty ratios corresponding to the ratios between the light emitting amounts from the R, G and B light emitting devices; a light adjusting sensor that determines an amount of reflected light from a subject emitted from the R, G and B light emitting devices; and a light emission controlling device that stops light emission of the R, G and B light emitting devices when the amount determined by the light adjusting sensor reaches a predetermined reference value.

**[0026]** The adjusting device may comprise a device that turns on and off R, G and B light emitting devices of numbers according to the ratios between the light emitting amounts from the R, G and B light emitting devices; a light adjusting sensor that determines an amount of reflected light from a subject emitted from the R, G and B light emitting devices; and a light emission controlling device that stops light emission of the R, G and B light emitting devices when the amount determined by the light adjusting sensor reaches a predetermined reference value.

**[0027]** Preferably, the electronic flash light source comprises: a white light source that emits white, electronic flash light; and color filters that are arranged movably in front of the white light source, wherein the adjusting device adjusts the color temperature of the electronic flash light by moving at least one of the color filters in front of the white light source.

**[0028]** To achieve the above-mentioned object, the present invention is directed to an electronic camera that stores color image signals of a subject image captured with a taking lens and an imaging device, the electronic camera comprising: a color temperature determining device that determines a color temperature of subject light before a shooting; an electronic flash light source that emits electronic flash light; an automatic white balance correcting device that corrects a white balance of the color image signals according to the color temperature determined by the color temperature determining device at the shooting irrespective of light emission of the electronic flash light source; and an adjusting device that adjusts a color temperature of the electronic flash light to the color temperature determined by the color temperature determining device.

**[0029]** The electronic camera emits the light with the color temperature that is the same as the color temperature of the subject light source, and the white balance is corrected according to the color temperature of the subject light source. The conventional electronic camera corrects the white balance no matter what the color temperature of the subject light source is.

**[0030]** To achieve the above-mentioned object, the present invention is directed to an electronic camera

that stores color image signals of a subject image captured with a taking lens and an imaging device, the electronic camera comprising: a color temperature determining device that determines a color temperature of subject light; a recording device that records at least one color temperature determined by the color temperature determining device; a designating device that reads the color temperature recorded in the recording device; an automatic white balance correcting device that corrects a white balance of the color image signals according to the color temperature read by the designating device; an electronic flash light source that emits electronic flash light; and an adjusting device that adjusts a color temperature of the electronic flash light to the color temperature read by the designating device. For example, the user records color temperatures of a spotlight of a ceremonial hall, a ceiling light and a studio light, and reads one of the color temperatures so that the electronic flash emits the light with the read color temperature, and the white balance is corrected according to the color temperature.

[0031] The color temperature determining device can determine the color temperature of the subject light from the color image signals of the subject image captured with the taking lens and the imaging device.

[0032] To achieve the above-mentioned object, the present invention is directed to an optical member that is one of a polygonal prism and a cylinder; a light emitting device array provided on a side of the optical member; and a reflecting mirror provided on at least a bottom of the optical member, wherein the light emitting device array emits light out of the optical member through a top of the optical member.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0033] The nature of this invention, as well as other objects and advantages thereof, will be explained in the following with reference to the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures and wherein:

Fig. 1 is a perspective view of an electronic flash of a camera of a first embodiment according to the present invention;

Fig. 2 is a back view of the electronic flash in Fig. 1; Figs. 3(A) and 3(B) are views showing a light source part of a light-emitting part in Fig. 1;

Fig. 4 is a block diagram of the electronic flash in Fig. 1;

Figs. 5(A), 5(B), 5(C), 5(D), 5(E), 5(F) and 5(G) are timing charts showing an operation of a system controller in Fig. 3;

Fig. 6 is a circuit diagram showing another method of controlling light emitting amounts of LEDs;

Fig. 7 is a timing chart showing a color temperature controlling method in which light emitting times of the LEDs are separately controlled;

Fig. 8 is a timing chart showing a color temperature controlling method in which a duty ratio of the LEDs is controlled;

Fig. 9 is a block diagram showing a second embodiment of an electronic flash of the camera according to the present invention;

Fig. 10 is a block diagram showing a third embodiment of an electronic flash of the camera according to the present invention;

Fig. 11 is a block diagram showing a fourth embodiment of an electronic flash of the camera according to the present invention;

Fig. 12 is a back view of an electronic camera that can adjust a color temperature of an electronic flash light according to the present invention;

Fig. 13 is a block diagram showing an inner structure of the electronic camera in Fig. 12;

Fig. 14 is a block diagram of an electronic flash that is built in or attached to the electronic camera in Fig. 12; and

Fig. 15 is a perspective view of a diode light emitting head according to the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0034] This invention will be described in further detail by way of example with reference to the accompanying drawings.

[0035] Fig. 1 is a perspective view of an electronic flash 10 for a camera of a first embodiment according to the present invention.

[0036] The electronic flash 10 is composed of a body 20 with a hot shoe 22 on its bottom and a light-emitting part 30.

[0037] Color temperature sensors 24 (photo sensors 24R, 24G and 24B with R, G and B filters) for measuring a color temperature of subject light are provided on the front of the body 20. A switch 26 for choosing a manual mode or an automatic mode and a color temperature setting switch 28 are provided on the side of the body 20. In the manual mode, a user manually sets a color temperature of an electronic flash light with a color temperature setting switch 28. In the automatic mode, the color temperature of the electronic flash light is automatically set.

[0038] A reference numeral 32 denotes a Fresnel lens of the light-emitting part 30, and a reference numeral 34 denotes a light-receiving sensor for adjusting the electronic flash light.

[0039] Fig. 2 is a back view of the electronic flash 10. Color temperature recording switches 21 (21-1, 21-2 and 21-3), indicators L1, L2 and L3 and a color temperature reading switch 23 are provided on the back of the electronic flash 10. When one of the color temperature recording switches 21 is pressed, the current color temperature of the subject light measured by the color temperature sensors 24 is recorded in a nonvolatile memory

(EEPROM) 25 (see Fig. 4) of the electronic flash 10. The three color temperature recording switches 21 make it possible to record three color temperatures.

[0040] Each time the color temperature reading switch 23 is pushed, one of the color temperatures recorded with the color temperature recording switches 21-1, 21-2 and 21-3 is read in order. The indicators L1, L2 and L3 correspond to the color temperature recording switches 21-1, 21-2 and 21-3, respectively, and one of the indicators L1, L2 and L3 corresponding to the selected color temperature is turned on. The color temperature of the electronic flash light is adjusted to the read color temperature.

[0041] Fig. 3(A) is a section of a light source part 36 of the light-emitting part 30, and Fig. 3(B) is a front view of the light source part 36.

[0042] The light source part 36 is composed of a reflector 37, LEDs 38 (R, G and B LEDs 38R, 38G and 38B) and a diffusion plate 39. The R, G and B LEDs 38R, 38G and 38B are arranged to form an array as shown in Fig. 3(B). The diffusion plate 39 diffuses high-directivity lights emitted from the LEDs 38. The numbers of the LEDs 38R, 38G and 38B does not need to be the same, and they are preferably arranged so that a white light is produced when all the LEDs 38 emit lights.

[0043] Fig. 4 is a block diagram of the electronic flash 10.

[0044] The electronic flash 10 has a battery 40, a step-up transformer 42, a large-capacity capacitor 44, operational amplifiers 46, 48 and 50, a system controller 52, a light adjusting circuit 54 and a temperature sensor 56 as well as the color temperature recording switches 21, the color temperature reading switch 23, the color temperature sensors 24, the EEPROM 25, the switch 26, the color temperature setting switch 28, the light-receiving sensor 34 and the LEDs 38.

[0045] The system controller 52 controls the electronic flash 10, and makes the step-up transformer 42 output the voltage of 10V from the voltage (for example, 6V) of the battery 40 in order to charge the capacitor 44 with the outputted voltage. The capacitor 44 is charged for two to five seconds, and can discharge to the LEDs 38 for more than 1/60sec (approximately 16ms).

[0046] The capacitor 44 discharges to the LEDs 38R, 38G and 38B through the operational amplifiers 46, 48 and 50, and the system controller 52 controls the operational amplifiers 46, 48 and 50 to control a light-emitting time and amount of the LEDs 38R, 38G and 38B.

[0047] The system controller 52 receives a light-emitting signal from the camera through the hot shoe 22 (see Fig. 1) in synchronization with a shutter release, and receives information (a guide number, etc.) for determining the light-emitting amount in a serial communication. When the switch 26 is on the manual mode, the system controller 52 controls the color temperature of the electronic flash light to that set with the color temperature setting switch 28. When the switch 26 is on the automatic mode, the system controller 52 controls the color tem-

perature of the electronic flash light to that of the subject light determined by the color temperature sensors 24. The color temperature sensors 24 are not limited to those. They determine the color temperature of the subject light according to the ratio between the R, G and B components of the light, but they may do that according to the ratio between the R and B components of the light.

[0048] When one of the color temperature recording switches 21 is pushed, the system controller 52 records the current color temperature of the subject light determined by the color temperature sensors 24 in the EEPROM 25. When one of the color temperature reading switches 23 is pushed, the system controller 52 reads the recorded color temperature, and controls the color temperature of the electronic flash light to the read color temperature. For example, the user records color temperatures of a spotlight of a ceremonial hall, a ceiling light and a studio light with the color temperature sensors 24 in the EEPROM 25, and reads one of the color temperatures with one of the color temperature reading switches 23 so that the electronic flash emits the light with the read color temperature.

[0049] Since the light amounts of the LEDs change according to their peripheral temperature, a temperature sensor 56 that determines the peripheral temperature of the LEDs 38 is provided. The system controller 52 controls the electric current to the LEDs 38 according to the peripheral temperature determined by the temperature sensor 56.

[0050] The operation of the system controller 52 will now be explained with reference to timing charts of Figs. 5(A), 5(B), 5(C), 5(D), 5(E), 5(F) and 5(G).

[0051] On receiving an electronic flash signal (Fig. 5(A)), the system controller 52 outputs a signal to the step-up transformer 42 for starting the charging of the capacitor 44. When the charging is finished, the system controller 52 stops the step-up transformer 42 (Figs. 5(B) and 5(C)).

[0052] When a shutter release button is half pressed, the system controller 52 gets ready for the discharging (Fig. 5(D)) and receives the information (the guide number, etc.) for determining the light emitting amount. When the switch 26 is on the automatic mode, the system controller 52 reads the color temperature of the subject light from one of the color temperature sensors 24. When the switch 26 is on the manual mode, the system controller 52 reads the manually-set color temperature corresponding to the operated color temperature reading switch 23 (Fig. 5(E)).

[0053] The system controller 52 determines the light emitting amount according to the received information, outputs a reference value for the light emitting amount to the light adjusting circuit 54, determines the ratio between the light emitting amounts of the LEDs 38R, 38G and 38B according to the color temperature of the subject light, and sets R, G and B light emitting levels from the ratio (Fig. 5(F)).

[0054] When the shutter release button is fully

pressed, the system controller 52 receives the light emitting signal in synchronization with the shutter release and outputs the R, G and B light emitting levels to positive-sequence input terminals of the operational amplifiers 46, 48 and 50. Signals that corresponds to electric currents to be sent to the LEDs 38R, 38G and 38B are inputted to negative-sequence input terminals of the operational amplifiers 46, 48 and 50, and the operational amplifiers 46, 48 and 50 control the electric currents flowing through the LEDs 38R, 38G and 38B according to the R, G and B light emitting levels.

[0055] The LEDs 38 emit the lights with the same color temperature as that of the subject light (Fig. 5(G)).

[0056] The light adjusting circuit 54 determines the light emitting amount with the light-receiving sensor 34. When the light emitting amount reaches the reference value, the light adjusting circuit 54 outputs the light-emission stop signal to the system controller 52, which outputs a signal for stopping the light emission of the LEDs 38 to the operational amplifiers 46, 48 and 50. This turns off the electric currents flowing through the LEDs 38 to stop the light emission of the LEDs 38.

[0057] Fig. 6 is a circuit diagram showing another method of controlling the light emitting amounts of the LEDs 38.

[0058] The electric currents flow from the capacitor 44 to the LEDs 38 through transistors 61, 62 and 63 and inductors 64, 65 and 66.

[0059] A step-down transformer 60 receives signals indicating R, G and B light-emitting levels, the light-emission signal in synchronization with the shutter release, and the light-emission stop signal. After receiving the light-emission signal, the step-down transformer 60 outputs pulses with a controlled duty ratio to bases of the transistors 61, 62 and 63 so that the electric currents corresponding to the light-emitting levels flow through the LEDs 38 until receiving the light-emission stop signal.

[0060] The transistors 61, 62 and 63 turn on and off due to the pulses, and pass the electric currents to the LEDs 38R, 38G and 38B through the inductors 64, 65 and 66 while they are on. While they are off, electric currents flows to the LEDs 38R, 38G and 38B through diodes 67, 68 and 69 due to induction electromotive forces of the inductors 64, 65 and 66.

[0061] The step-down transformer 60 monitors the electric currents flowing through the LEDs 38, and adjusts the duty ratio of the pulses inputted to the transistors 61, 62 and 63 according to the light emitting levels.

[0062] As shown in Fig. 7, light-emitting times of the LEDs 38R, 38G and 38B may be controlled for a desired ratio between the light-emitting amounts of the LEDs 38.

[0063] When the ratio between the B, R and G light-emitting amounts (the same as the ratio between the light-emitting times, for convenience) is 1:2:4, the LEDs 38R, 38G and 38B start emitting the lights at one time, and the LEDs 38B stop emitting the lights a time  $t$  later, and the LEDs 38R stop emitting the lights a time  $2t$  later,

and the LEDs 38G stop emitting the lights a time  $4t$  later.

[0064] The time  $t$  will be explained.

[0065] A reference value  $V_{ref}'$  is calculated by the following equation 1,

$$V_{ref}' = (3a/(a+b+c)) \times V_{ref} \quad \text{equation 1,}$$

wherein  $V_{ref}$  is the reference value for adjusting the light-emission amounts and  $a:b:c$  ( $a \leq b \leq c$ ) is the ratio between the light-emitting amounts.

[0066] When the ratio  $a:b:c$  is 1:2:4 as shown in Fig. 7, the reference value  $V_{ref}'$  is  $(3/7) V_{ref}$ .

[0067] The LEDs 38R, 38G and 38B start emitting the lights at one time, and the light adjusting circuit 54 determines the light emission amount with the light-receiving sensor 34. When the light emission amount reaches the reference value  $V_{ref}'$ , the LEDs with the lowest light emission amount (the LEDs 38B in this case) stop emitting the lights, and the light emission time  $t$  is measured. Then, the light emission times of the other LEDs according to the light emission time  $t$  and the ratio ( $a:b:c$ ) are calculated. In case of the ratio 1:2:4, the light emission time of the LEDs 38R is  $2t$ , and the light emission time of the LEDs 38G is  $4t$ . In the embodiment, the light-receiving sensor 34 that is sensitive to all the R, G and B lights, but a light-receiving sensor that is sensitive only to the lights with the lowest light emission amount may be used. In this case, the number  $3a$  in the equation 1 is replaced with the number  $a$ .

[0068] Fig. 8 shows a case in which the duty ratios of the LEDs 38R, 38G and 38B are adjusted to control the color temperature of the electronic flash light (the ratio between the R, G and B light-emission amounts).

[0069] The duty ratios of the LEDs 38R, 38G and 38B are determined so that the ratio between the total light-emitting times of the LEDs 38 is the ratio between the R, G and B light emission amounts.

[0070] The LEDs 38R, 38G and 38B start emitting the lights at one time, and end it at one time when the light emission amount reaches the desired amount.

[0071] If each LED can be turned on and off, the numbers of the LEDs 38R, 38G and 38B to be turned on may be controlled.

[0072] Fig. 9 is a block diagram showing a second embodiment of an electronic flash 70 of the camera according to the present invention.

[0073] Unlike the electronic flash 10 of the first embodiment, the electronic flash 70 does not adjust the color temperature and has only a milky-white LED 71. Switches S1 and S2 turn on and off with an electronic flash switch. When the switches S1 and S2 are turned on, a step-up transformer 73 outputs a voltage from that of a battery 72 to charge a capacitor 74. When the switch S1 is turned on, an LED 75 for indicating the charging is turned on. When the voltage of the capacitor 74 reaches a reference voltage inputted to an operational ampli-

fier 76, the charging is finished and the LED 75 turns off.

[0074] A switch S3 is a normally open switch, and it is closed for an instant when the shutter release button is pushed.

[0075] When the switch S3 is open, a capacitor 78 is charged to more than a predetermined voltage with a light-receiving sensor 77 for the light adjusting, and an operational amplifier 79 outputs an L-level signal to turn off a transistor 80. Thus, the electric current does not flow through the LED 71 and it does not emit a light even when the capacitor 74 for the light emission has been charged.

[0076] When the shutter release button is pushed and the switch S3 is closed, the capacitor 78 discharges and the operational amplifier 79 outputs an H-level signal to turn on the transistor 80. This allows the flow of electric current from the capacitor 74 to the LED 71, which emits the light.

[0077] Then, the capacitor 78 is charged with the light-receiving sensor 77 for the light adjusting. When the voltage of the capacitor 78 reaches that of a resistor 81, the operational amplifier 79 outputs the L-level signal to turn off the transistor 80. This turns off the LED 71.

[0078] A resistance of an adjustable resistor 82 can be adjusted according to the guide number, and this changes the voltage of the resistor 81 to adjust the light emission amount of the LED 71. A switch S4 that turns on with the shutter release button may be provided instead of an automatic electronic flash circuit (including the light-receiving sensor 77 for the light adjusting) which is enclosed by a dashed line.

[0079] Fig. 10 is a block diagram showing a third embodiment of an electronic flash 90 of the camera according to the present invention.

[0080] Unlike the electronic flash 10 of the first embodiment, the electronic flash 90 has an organic electroluminescence panel (organic EL panel) 91. Parts that are the same as those in Fig. 4 are denoted by the same reference numerals, and they will not be explained in detail.

[0081] The organic EL panel 91 is formed in such a manner that R organic ELs whose spectrum peak wavelength is 600-740nm (red area), G organic ELs whose spectrum peak wavelength is 500-600nm (green area) and B organic ELs whose spectrum peak wavelength is 380-500nm (blue area) are arranged in the same way as the LEDs 38 in Fig. 3(B). Light emitting brightnesses and times of the R, G and B organic ELs are controlled according to control signals inputted from the system controller 52.

[0082] This enables the organic EL panel 91 to emit a light with the desired color temperature.

[0083] A plasma light-emitting device panel in which plasma light-emitting devices are arranged as an array may be used instead of the organic EL panel 91. The plasma light-emitting devices stimulates R, G and B fluorescent materials by emitting ultraviolet rays to make them emit R, G and B lights.

[0084] Fig. 11 is a block diagram showing a fourth embodiment of an electronic flash 92 of the camera according to the present invention.

[0085] Unlike the electronic flash 10 of the first embodiment, the electronic flash 92 has a light source that can change the color temperature of the electronic flash light with color filters 94. Parts that are the same as those in Fig. 4 are denoted by the same reference numerals, and they will not be explained in detail.

[0086] The light source is composed of a light emitting part 93 that emits a white light, the color filters 94 (an R filter 94R and a B filter 94B) and a filter driving motor 95.

[0087] The color filters 94 are movably provided in front of the light emitting part 93, and a rack 94A is connected to one end of the color filters 94. A pinion 95A engaged with the rack 94A is fixed to a driving shaft of the filter driving motor 95. Driving the filter driving motor 95 moves the color filters 94 vertically in Fig. 11.

[0088] The light source emits a light with the color temperature (5500-6000 degrees Kelvin) of the daytime sun when the light emitting part 93 is not covered as shown in Fig. 11. When the R filter 94R covers the light emitting part 93, the light source emits a light with the color temperature (2000-3000 degrees Kelvin) of the rising or setting sun. When the B filter 94B covers the light emitting part 93, the light source emits a light with the color temperature (10000-20000 degrees Kelvin) of the blue sky.

[0089] When the color temperature of the electronic flash light is set automatically or manually, the system controller 52 controls the filter driving motor 95 to move the color filters 94 for the light with the color temperature that is the closest to the set color temperature. When the shutter release button is fully pushed and the system controller 52 receives the light emission signal in synchronization with the shutter release, the system controller 52 outputs an electronic flash ON signal to the light emitting part 93 to emit the light.

[0090] The light adjusting circuit 54 determines the light emission amount with the light-receiving sensor 34 for the light adjusting. When the light emission amount reaches a reference value, the light adjusting circuit 54 outputs an electronic flash OFF signal to the light emitting part 93 to stop the light emission.

[0091] Fig. 12 is a back view of an electronic camera 100 that can adjust the color temperature of the electronic flash light according to the present invention.

[0092] The user rotates a mode dial 101 to set one of shooting modes including a manual shooting mode, an automatic shooting mode and a person shooting mode. A shutter release button 102 is provided in the center of the mode dial 101, and the shutter release button 2 can be pushed half and fully.

[0093] As shown in Fig. 12, an eyepiece 103, a shift key 104, a display key 105, a record mode/play mode switch 106, a cancel key 107, an execution key 108, a multifunction cross key 109 and a liquid crystal monitor 152 are provided on the back of the digital camera.

[0094] Fig. 13 is a block diagram showing the inner structure of the electronic camera 100 in Fig. 12.

[0095] A subject image formed on a light-receiving surface of a charge coupled device (CCD) 114 through a taking lens 110 and a diaphragm 112 is converted into signal electric charges corresponding to the amount of an incident light by each sensor. The stored signal electric charges are read out to shift registers with read gate pulses applied from a CCD driving circuit 116, and sequentially read out as voltage signals corresponding to the signal electric charges with register transfer pulses. The CCD 114 has an electric shutter function for controlling the exposure time (shutter speed) by outputting the stored signal electric charges with shutter gate pulses.

[0096] The voltage signals are outputted from the CCD 114 to a correlative double sampling circuit (CDS circuit) 118, which samples and holds R, G and B signals of each pixel. The CDS circuit 118 outputs the R, G and B signals to an A/D converter 120, which converts the R, G and B signals into digital R, G and B signals and outputs the digital R, G and B signals. The CCD driving circuit 116, the CDS circuit 118 and the A/D converter 120 are synchronized by timing signals outputted from a timing generator 122.

[0097] The digital R, G and B signals outputted from the A/D converter 120 are temporarily stored in a memory 124, and then outputted to a digital signal processing circuit 126. The digital signal processing circuit 126 comprises a synchronizing circuit 128, a white balance adjusting circuit 130, a gamma correcting circuit 132, a YC signal producing circuit 134 and a memory 136.

[0098] The synchronizing circuit 128 converts the dot-sequential R, G and B signals read from the memory 124 into synchronous R, G and B signals, which are outputted to the white balance adjusting circuit 130. The white balance adjusting circuit 130 has multipliers 130R, 130G and 130B that increases or decreases digital values of the R, G and B signals, and the R, G and B signals are inputted to the multipliers 130R, 130G and 130B, respectively. White balance correction values (gains) Rg, Gg and Bg for adjusting the white balance are outputted from a central processing unit (CPU) 138 to the multipliers 130R, 130G and 130B, respectively. Each of the multipliers 130R, 130G and 130B multiplies the corresponding digital value and gain together, and the multipliers 130R, 130G and 130B get R', G' and B' signals. The white balance adjusting circuit 130 outputs the R', G' and B' signals to the gamma correcting circuit 132. The gains Rg, Gg and Bg will be later explained in detail.

[0099] The gamma correcting circuit 32 corrects the R', G' and B' signals to R, G and B signals with desired gamma characteristic and outputs the R, G and B signals to the YC signal producing circuit 134. The YC signal producing circuit 134 produces luminance signals Y and chroma signals Cr and Cb (YC signals) from the R, G and B signals. The YC signals are stored in the memory 136.

[0100] The YC signals are read from the memory 136 and outputted from the liquid crystal monitor 152 so that a moving image or a still image is displayed on the liquid crystal monitor 152.

[0101] After the shooting, the YC signals are compressed with a predetermined format by the compressing/decompressing circuit 154, and the compressed image data is stored in a storage medium such as a memory card by a storage part 156. In the reproducing mode, the image data stored in the memory card or the like is decompressed, and the decompressed image data is outputted to the liquid crystal monitor 152 so that the image is displayed on the liquid crystal monitor 152.

[0102] The CPU 138 controls the circuits according to inputs from a camera control part 140 including the mode dial 101, the shutter release button 102 and the cross key 109. The CPU 138 also controls automatic focusing, automatic exposure and automatic white balance. For example, the automatic focusing is contrast automatic focusing that moves the taking lens 110 through a driving part 142 so that the high-frequency component of the G signal is the maximum when the shutter release button 102 is half pressed.

[0103] In the automatic exposure, the R, G and B signals are read, and the subject brightness (exposure values) is determined according to integrated values of the R, G and B signals. The F-number and the shutter speed are determined from the exposure value. When the shutter release button 102 is fully pressed, the CPU 138 drives the diaphragm 112 through a diaphragm driving part 144 for the determined F-number, and controls the exposure time for the determined shutter speed. Image data of one frame is captured and processed, and then stored in the storage medium.

[0104] The method of correcting the white balance will now be explained.

[0105] To manually correct the white balance, the user chooses the record mode with the record mode/play mode switch 106 and selects the manual shooting mode with the mode dial 101. Then, the user pushes the execution key 108 to display a menu for setting the white balance on the liquid crystal monitor 152 as shown in Fig. 12, and selects an icon (AUTO, icons showing subject light sources, and M) with the cross key 109. When the icon "AUTO" is selected, the color temperature of the subject light (the type of the subject light source) is measured and the white balance is corrected according to the color temperature. When one of the icons showing the light sources is selected, the white balance is corrected according to the subject light source. When the icon "M" is selected, a recorded color temperature is read and the white balance is corrected according to the color temperature.

[0106] The measurement of the color temperature of the subject light (the type of the subject light source) in the automatic shooting mode or when the icon "AUTO" is selected in the manual shooting mode will be explained.

[0107] The image is divided into multiple areas (8 by 8), and an integrating circuit 148 in Fig. 13 calculates average values of the R, G and B signals in each area stored in the memory 124 and outputs them to the CPU 138. Multipliers 150R, 150G and 150B are provided between the integrating circuit 148 and the CPU 138, and gains are inputted to the multipliers 150R, 150G and 150B.

[0108] The CPU 138 determines the subject light source (daylight, shade-cloudiness, a fluorescent lamp, a tungsten lamp, or the like) according to the average values of the R, G and B signals in each area. Ratios R/G and B/G between the average values of the R, G and B signals in each area are calculated, and determination frames for the subject light sources are set on a co-ordinate system with the ratio R/G as the x coordinate and the ratio B/G as the y coordinate. The number of areas in each determination frame is determined, and the subject light sources is determined according to the brightness level of the subject and the number of areas in each determination frame (see Japanese Patent Provisional Publication No. 2000-224608). The method of determining the subject light source (color temperature) is not limited to this.

[0109] After determining the subject light source, the CPU 138 determines the white balance correction values (gains) Rg, Gg and Bg that are suitable for the subject light source and outputs them to the multipliers 130R, 130G and 130B, respectively. The multipliers 130R, 130G and 130B outputs the white-balanced R', G' and B' signals to the gamma correcting circuit 132.

[0110] The digital signal processing circuit 126 corrects the white balance in the embodiment, but an analog signal processing including the CDS circuit 118 and a gain control amplifier (not shown) may do that. The ratios R/G and B/G are changed in the embodiment, but the chroma signals Cr and Cb may be changed.

[0111] The method of controlling the electronic flash 146 will now be explained.

[0112] Fig. 14 is a block diagram of the electronic flash 146 that is built in or attached to the electronic camera 100. Parts that are the same as those in Fig. 4 are denoted by the same reference numerals, and they will not be explained.

[0113] The electronic flash 146 is different from the electronic flash 10 of the first embodiment in that it does not have the color temperature sensors 24 for determining the color temperature of the subject light source. The color temperature is determined according to the R, G and B signals obtained from the CCD 114.

[0114] The CPU 138 outputs the light-emission signal in synchronization with the shutter release and serial signals indicating the light emission amount and the color temperature of the electronic flash light to the system controller 52 of the electronic flash 146.

[0115] A conventional electronic camera prohibits the light emission in the manual white balance mode, so that the electronic flash light does not affect the manually-

corrected white balance. However, the electronic camera 100 of the present invention does not prohibit the light emission even in the manual white balance mode.

[0116] In addition, the conventional electronic camera does not perform either the automatic white balance correction or the manual white balance correction, and adjusts the white balance with the fixed gains according to the electronic flash light (the daylight) to perform a shooting with the electronic flash. However, the electronic camera 100 of the present invention performs the automatic white balance correction or the manual white balance correction.

[0117] The electronic camera 100 controls the electronic flash 146 to emit the light with the automatically-measured color temperature of the subject light source in the automatic white balance mode. The electronic camera 100 controls the electronic flash 146 to emit the light with the manually-set color temperature in the manual white balance mode.

[0118] Therefore, the electronic flash light does not affect the automatically or manually corrected white balance.

[0119] Fig. 15 is a perspective view of a light emitting head 190.

[0120] The light emitting head 190 has a rectangular diffusion plate 192, and R, G and B LEDs 193R, 193G and 193B are provided on the four sides of the diffusion plate 192, and a dish-shaped reflecting mirror 194 is arranged on the bottom of the diffusion plate 192. Mirrors may be provided on parts of the sides of the diffusion plate 192 without the LEDs 193R, 193G and 193B to prevent lights from leaking through the sides.

[0121] The LEDs 193R, 193G and 193B emit lights out of the diffusion plate 192 through its top.

[0122] The number of the G LEDs 193G is larger than those of the R and B LEDs 193R and 193B to produce a white light. A number of LEDs may be arranged on the sides of the diffusion plate 192. The diffusion plate 192 does not necessarily have to be rectangular, and it may be a polygonal prism or a cylinder. A light guide member may be used instead of the diffusion plate 192, and a diffusion plate is provided only on its light emission surface.

[0123] According to the present invention, since the LEDs, the organic ELs or the plasma light-emitting devices are used as the electronic flash light source, the light-emission (brightness) level and the light emission time can be easily changed. In addition, since the R, G and B light-emitting devices are used, the color temperature of the electronic flash light can be manually or automatically changed. For example, back light correction for the sun light in the morning or evening can be performed according to the color temperature of the sun light, and this prevents unnatural colors of a picture due to the electronic flash light.

[0124] Moreover, since the large-capacity capacitor is charged slowly and it discharges quickly, the electric energy can be obtained with the small battery. Further-

more, fall of the voltage of the battery can be prevented at the light emission, and misoperation of the other circuits can be prevented.

[0125] The LEDs or the like can continuously emit the lights for slow shutter speeds, and they can be used as a light source at the auto focus.

[0126] It should be understood, however, that there is no intention to limit the invention to the specific forms disclosed, but on the contrary, the invention is to cover all modifications, alternate constructions and equivalents falling within the spirit and scope of the invention as expressed in the appended claims.

## Claims

1. An electronic flash (10) of a camera, comprising:
  - an electronic flash light source (36) comprising a light emitting diode (38); and
  - a light emission control device (52) that makes the electronic flash light source (36) emit light by supplying electric energy to the light emitting diode (38).
2. The electronic flash (10) as defined in claim 1, wherein the electronic flash light source (36) comprises R, G and B light emitting diodes (38R, 38G and 38B).
3. The electronic flash (10) as defined in claim 2, further comprising:
  - a color temperature setting device (28) that manually sets a color temperature of the light emitted from the electronic flash light source (36),
  - wherein the light emission control device (52) controls ratios between light emission amounts of the R, G and B light emitting diodes (38R, 38G and 38B) so that a color temperature of the light emitted from the electronic flash light source (36) becomes the color temperature set by the color temperature setting device (28).
4. The electronic flash (10) as defined in claim 2, further comprising:
  - a color temperature determining device (21) that determines a color temperature of subject light,
  - wherein the light emission control device (52) controls ratios between light emission amounts of the R, G and B light emitting diodes (38R, 38G and 38B) so that a color temperature of the light emitted from the electronic flash light source (36) becomes the color temperature determined by the color temperature determining
- device (21).
5. The electronic flash (10) as defined in claim 1, further comprising:
  - a capacitor (44) with a large capacity that is charged by a battery (40),
  - wherein the light emission control device (52) supplies the electric energy from the capacitor (44) to the light emitting diode (38).
6. The electronic flash (10) as defined in claim 1, further comprising:
  - a temperature sensor (56) that determines a peripheral temperature of the light emitting diode (38),
  - wherein the light emission control device (52) controls the electric energy to obtain a desired light emission amount according to the peripheral temperature determined by the temperature sensor (56).
7. An electronic flash (10) of a camera, comprising:
  - an electronic flash light source (36) that emits electronic flash light; and
  - an adjusting device that adjust a color temperature of the electronic flash light emitted from the electronic flash light source (36).
8. The electronic flash (10) as defined in claim 7, wherein the adjusting device comprises:
  - a color temperature setting device (28) that manually sets a color temperature of the electronic flash light; and
  - a light emission control device (54) that controls a color temperature of the electronic flash light to the color temperature set by the color temperature setting device (28).
9. The electronic flash (10) as defined in claim 7, wherein the adjusting device comprises:
  - a color temperature determining device (21) that determines a color temperature of subject light; and
  - a light emission control device (54) that controls a color temperature of the electronic flash light to the color temperature determined by the color temperature determining device (21).
10. The electronic flash (10) as defined in claim 9, wherein the color temperature determining device (21) has determining devices (24) that convert color components of the subject light into electric signals and determines the color temperature of the subject

light according to a ratio between determination signals of the determining devices (24).

11. The electronic flash (10) as defined in claim 9, wherein the color temperature determining device (21) determines the color temperature of the subject light according to color image signals of a subject image captured by an imaging device of the camera.
12. The electronic flash (10) as defined in claim 7, wherein the electronic flash light source (36) comprises a light emitting device (38, 91) of which R, G and B light amounts are separately controlled.
13. The electronic flash (10) as defined in claim 12, wherein the light emitting device (38, 91) comprises one of a light emitting diode (38), an organic electroluminescence light emitting device (91) and a plasma light emitting device.
14. The electronic flash (10) as defined in claim 12, further comprising:
  - a capacitor (44) with a large capacity that is charged by a battery (40),
  - wherein the adjusting device supplies the electric energy from the capacitor (44) to the light emitting device (38, 91).
15. The electronic flash (10) as defined in claim 12, further comprising:
  - a temperature sensor (56) that determines a peripheral temperature of the light emitting device (38, 91),
  - wherein the adjusting device controls the electric energy to obtain a desired light emission amount according to the peripheral temperature determined by the temperature sensor (56).
16. The electronic flash (10) as defined in claim 12, wherein the adjusting device adjusts the color temperature of the electronic flash light by controlling ratios between the R, G and B light amounts of the light emitting device (38, 91).
17. The electronic flash (10) as defined in claim 12, wherein the light emitting device (38, 91) comprises R, G and B light emitting devices (38R, 38G and 38B).
18. The electronic flash (10) as defined in claim 17, wherein the adjusting device controls the ratios between the light emitting amounts from the R, G and B light emitting devices (38R, 38G and 38B) by separately turning on and off the R, G and B light emit-

ting devices (38R, 38G and 38B).

19. The electronic flash (10) as defined in claim 18, wherein the adjusting device comprises:

- a light adjusting sensor (34) that determines one of an amount of reflected light from a subject emitted from one of the R, G and B light emitting devices (38R, 38G and 38B) of which light emitting amount is smallest among the R, G and B light emitting devices (38R, 38G and 38B) and an amount of reflected light from the subject emitted from the R, G and B light emitting devices (38R, 38G and 38B);
- a first light emission controlling device (52) that stops light emission of the one of the R, G and B light emitting devices (38R, 38G and 38B) when the one of the amounts determined by the light adjusting sensor (34) reaches a predetermined reference value according to the ratios between the light emitting amounts from the R, G and B light emitting devices (38R, 38G and 38B);
- a measuring device (52) that measures a light emitting time of the one of the R, G and B light emitting devices (38R, 38G and 38B);
- a calculating device (52) that calculates light emitting times of others of the R, G and B light emitting devices (38R, 38G and 38B) according to the light emitting time measured by the measuring device (52) and the ratios between the light emitting amounts from the R, G and B light emitting devices (38R, 38G and 38B); and
- a second light emission controlling device (52) that stops light emission of the others of the R, G and B light emitting devices (38R, 38G and 38B) according to the light emitting times calculated by the calculating device (52).

20. The electronic flash (10) as defined in claim 18, wherein the adjusting device comprises:

- a device (61, 62 and 63) that turns on and off the R, G and B light emitting devices (38R, 38G and 38B) with duty ratios corresponding to the ratios between the light emitting amounts from the R, G and B light emitting devices (38R, 38G and 38B);
- a light adjusting sensor (34) that determines an amount of reflected light from a subject emitted from the R, G and B light emitting devices (38R, 38G and 38B); and
- a light emission controlling device (52) that stops light emission of the R, G and B light emitting devices (38R, 38G and 38B) when the amount determined by the light adjusting sensor (34) reaches a predetermined reference value.

21. The electronic flash (10) as defined in claim 18, wherein the adjusting device comprises:

a device that turns on and off R, G and B light emitting devices (38R, 38G and 38B) of numbers according to the ratios between the light emitting amounts from the R, G and B light emitting devices (38R, 38G and 38B);  
 a light adjusting sensor (34) that determines an amount of reflected light from a subject emitted from the R, G and B light emitting devices (38R, 38G and 38B); and  
 a light emission controlling device (52) that stops light emission of the R, G and B light emitting devices when the amount determined by the light adjusting sensor (34) reaches a predetermined reference value.

22. The electronic flash (10) as defined in claim 7, wherein the electronic flash light source comprises:

a white light source (93) that emits white electronic flash light; and  
 color filters (94) that are arranged movably in front of the white light source (93),  
 wherein the adjusting device adjusts the color temperature of the electronic flash light by moving at least one of the color filters (94) in front of the white light source (93).

23. An electronic camera (100) that stores color image signals of a subject image captured with a taking lens (110) and an imaging device (114), the electronic camera (100) comprising:

a color temperature determining device (24) that determines a color temperature of subject light before a shooting;  
 an electronic flash light source (38) that emits electronic flash light;  
 an automatic white balance correcting device (130) that corrects a white balance of the color image signals according to the color temperature determined by the color temperature determining device (24) at the shooting irrespective of light emission of the electronic flash light source (38); and  
 an adjusting device that adjusts a color temperature of the electronic flash light to the color temperature determined by the color temperature determining device (24).

24. The electronic camera (100) as defined in claim 23, wherein the color temperature determining device (24) determines the color temperature of the subject light from the color image signals of the subject image captured with the taking lens (110) and the imaging device (114).

25. An electronic camera (100) that stores color image signals of a subject image captured with a taking lens (110) and an imaging device (114), the electronic camera (100) comprising:

a color temperature determining device (24) that determines a color temperature of subject light;  
 a recording device (25) that records at least one color temperature determined by the color temperature determining device (24);  
 a designating device (23) that reads the color temperature recorded in the recording device (25);  
 an automatic white balance correcting device (130) that corrects a white balance of the color image signals according to the color temperature read by the designating device (23);  
 an electronic flash light source (36) that emits electronic flash light; and  
 an adjusting device that adjusts a color temperature of the electronic flash light to the color temperature read by the designating device (23).

26. The electronic camera (100) as defined in claim 25, wherein the color temperature determining device (24) determines the color temperature of the subject light from the color image signals of the subject image captured with the taking lens (110) and the imaging device (114).

27. A light emitting head (190), comprising:

an optical member (192) that is one of a polygonal prism and a cylinder;  
 a light emitting device array (193) provided on a side of the optical member (192); and  
 a reflecting mirror (194) provided on at least a bottom of the optical member (192),  
 wherein the light emitting device array (193) emits light out of the optical member (192) through a top of the optical member (192).

FIG. 1

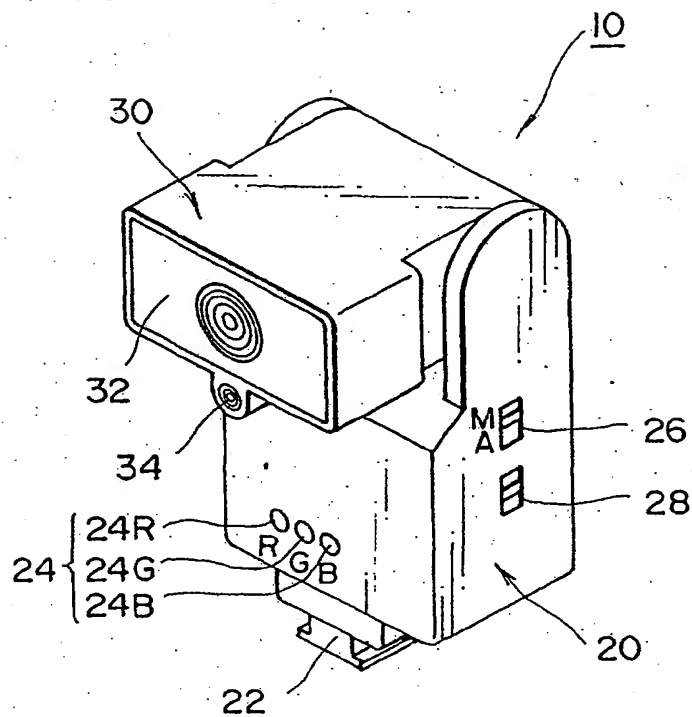


FIG. 2

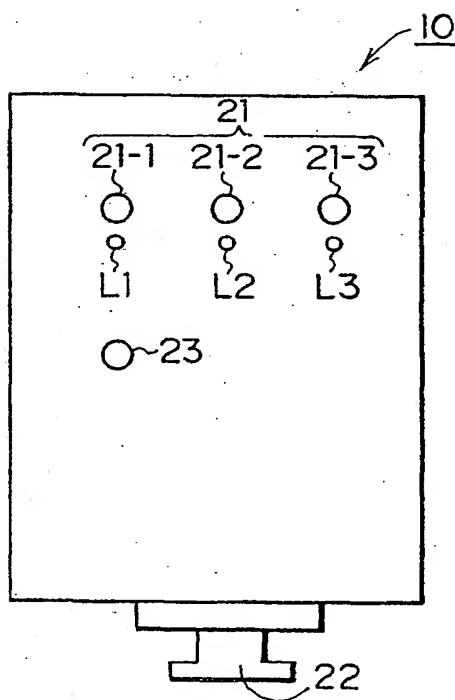


FIG. 3 (A)

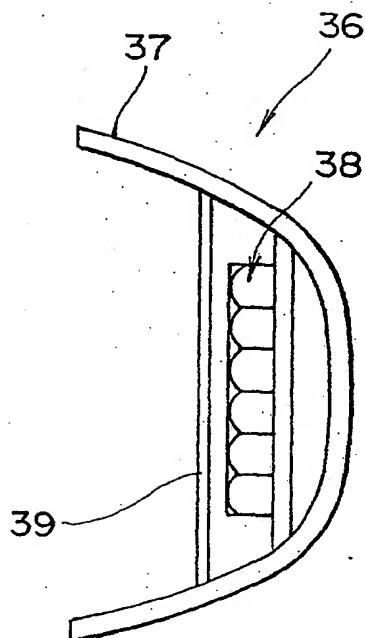


FIG. 3 (B)

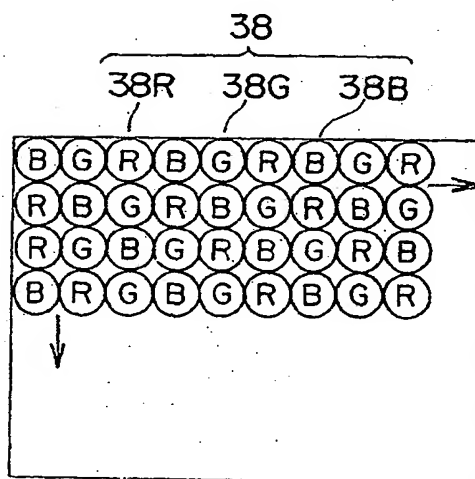


FIG. 4

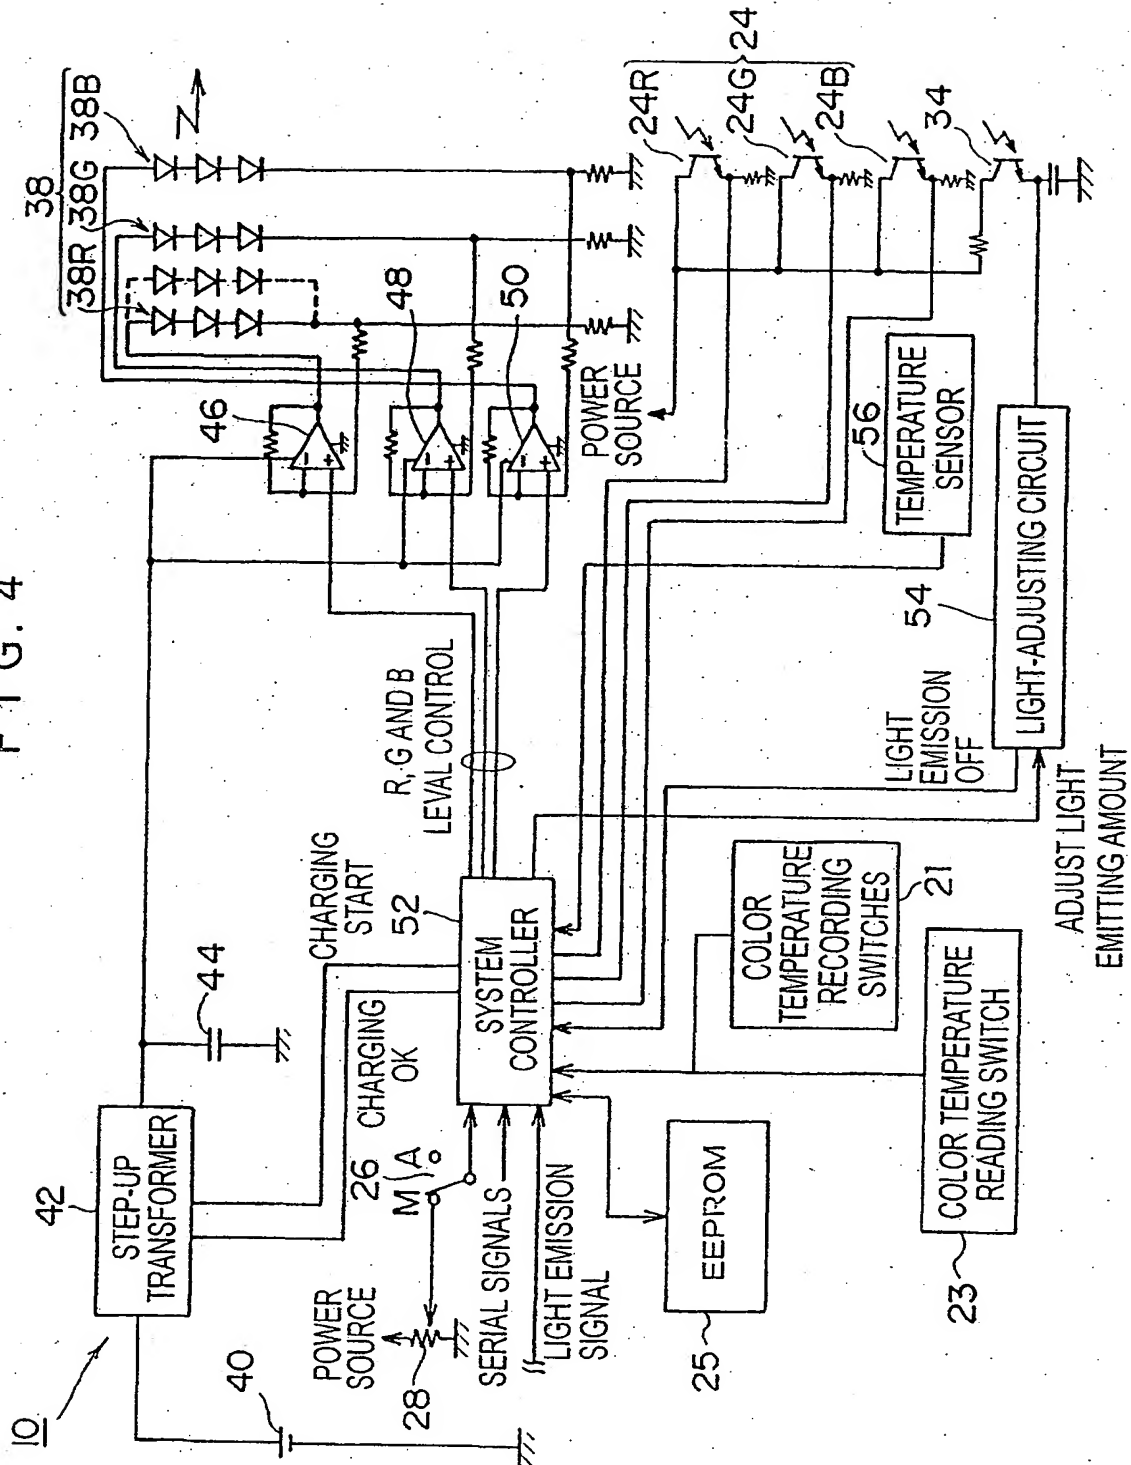


FIG. 5 (A)




FIG. 5 (B)



FIG. 5 (C)



FIG. 5 (D)

READY FOR DISCHARGING



FIG. 5 (E)

COLOR TEMPERATURE READING




FIG. 5 (F)

R, G AND B LIGHT EMISSION LEVEL SETTING




FIG. 5 (G)

SHUTTER RELEASE (LIGHT EMISSION)




FIG. 6

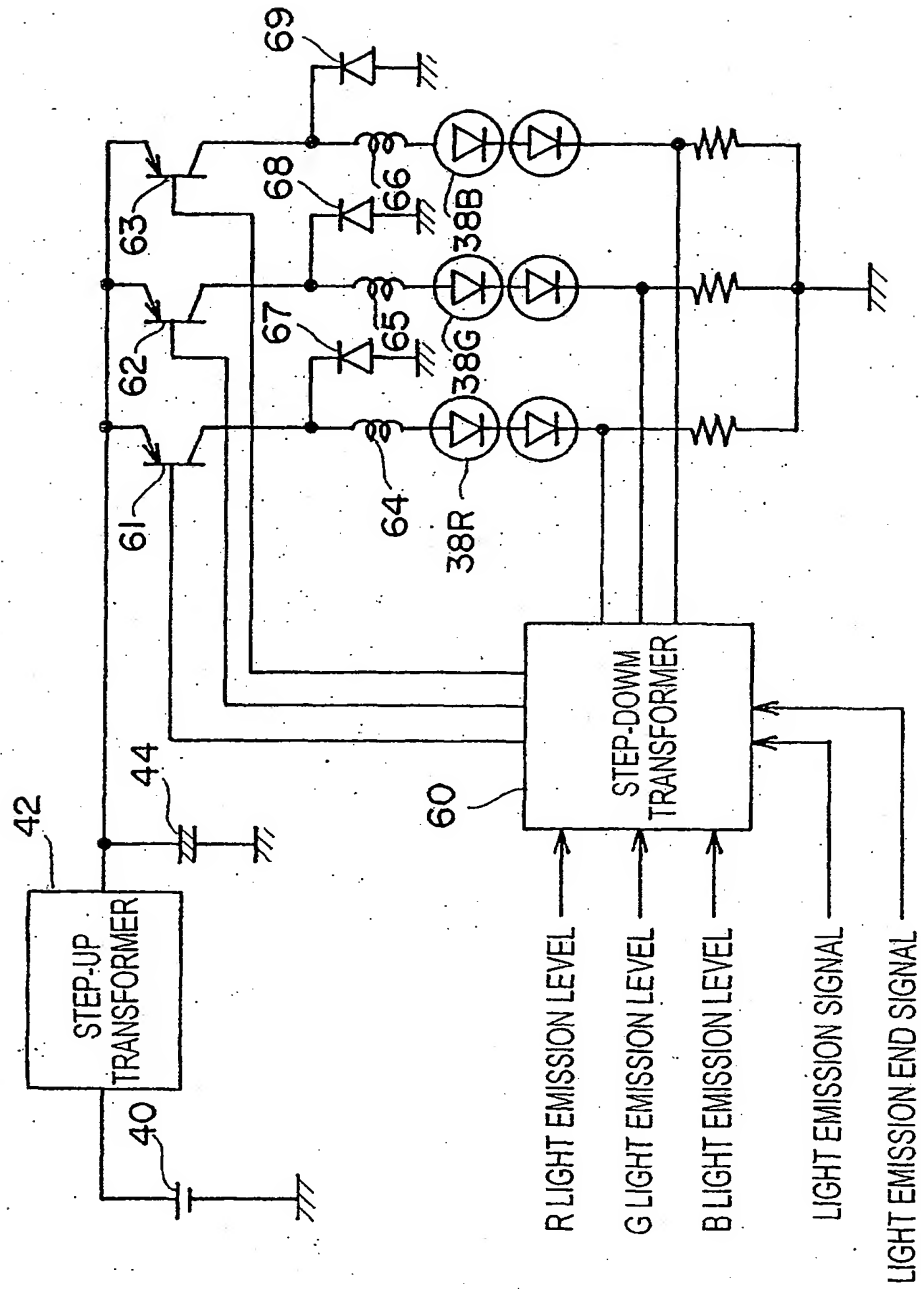


FIG. 7

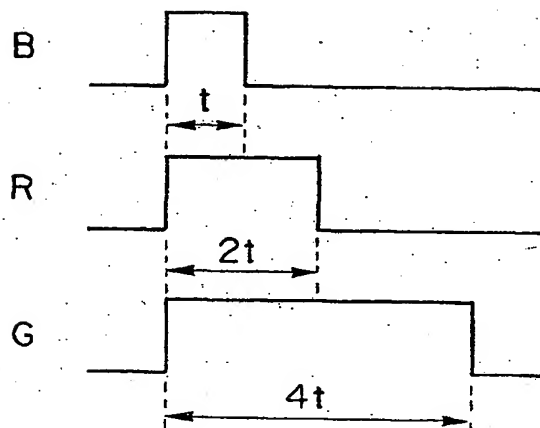


FIG. 8

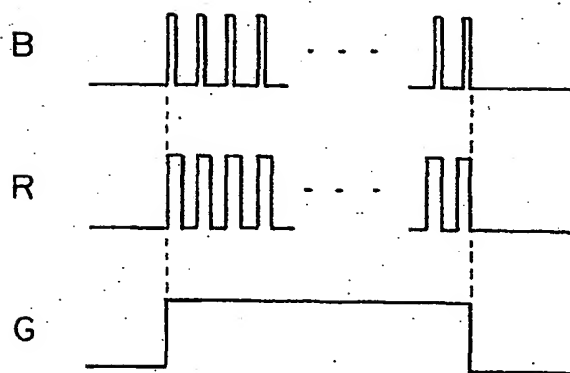


FIG. 9

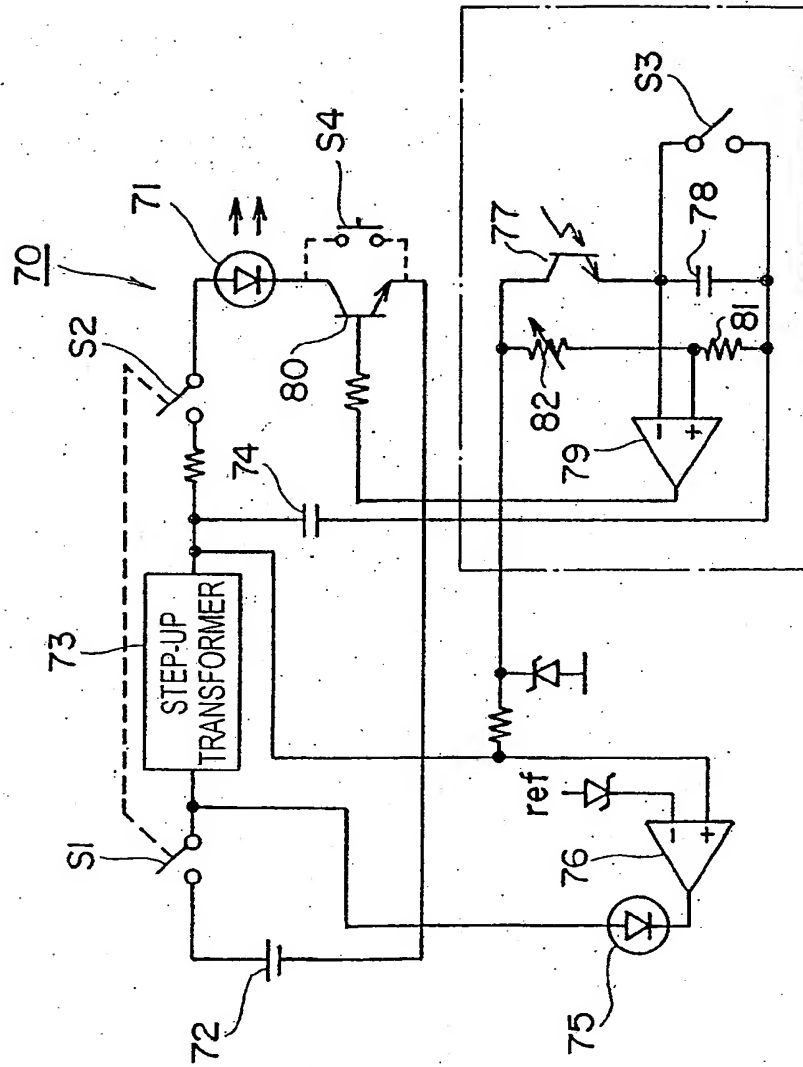


FIG. 10

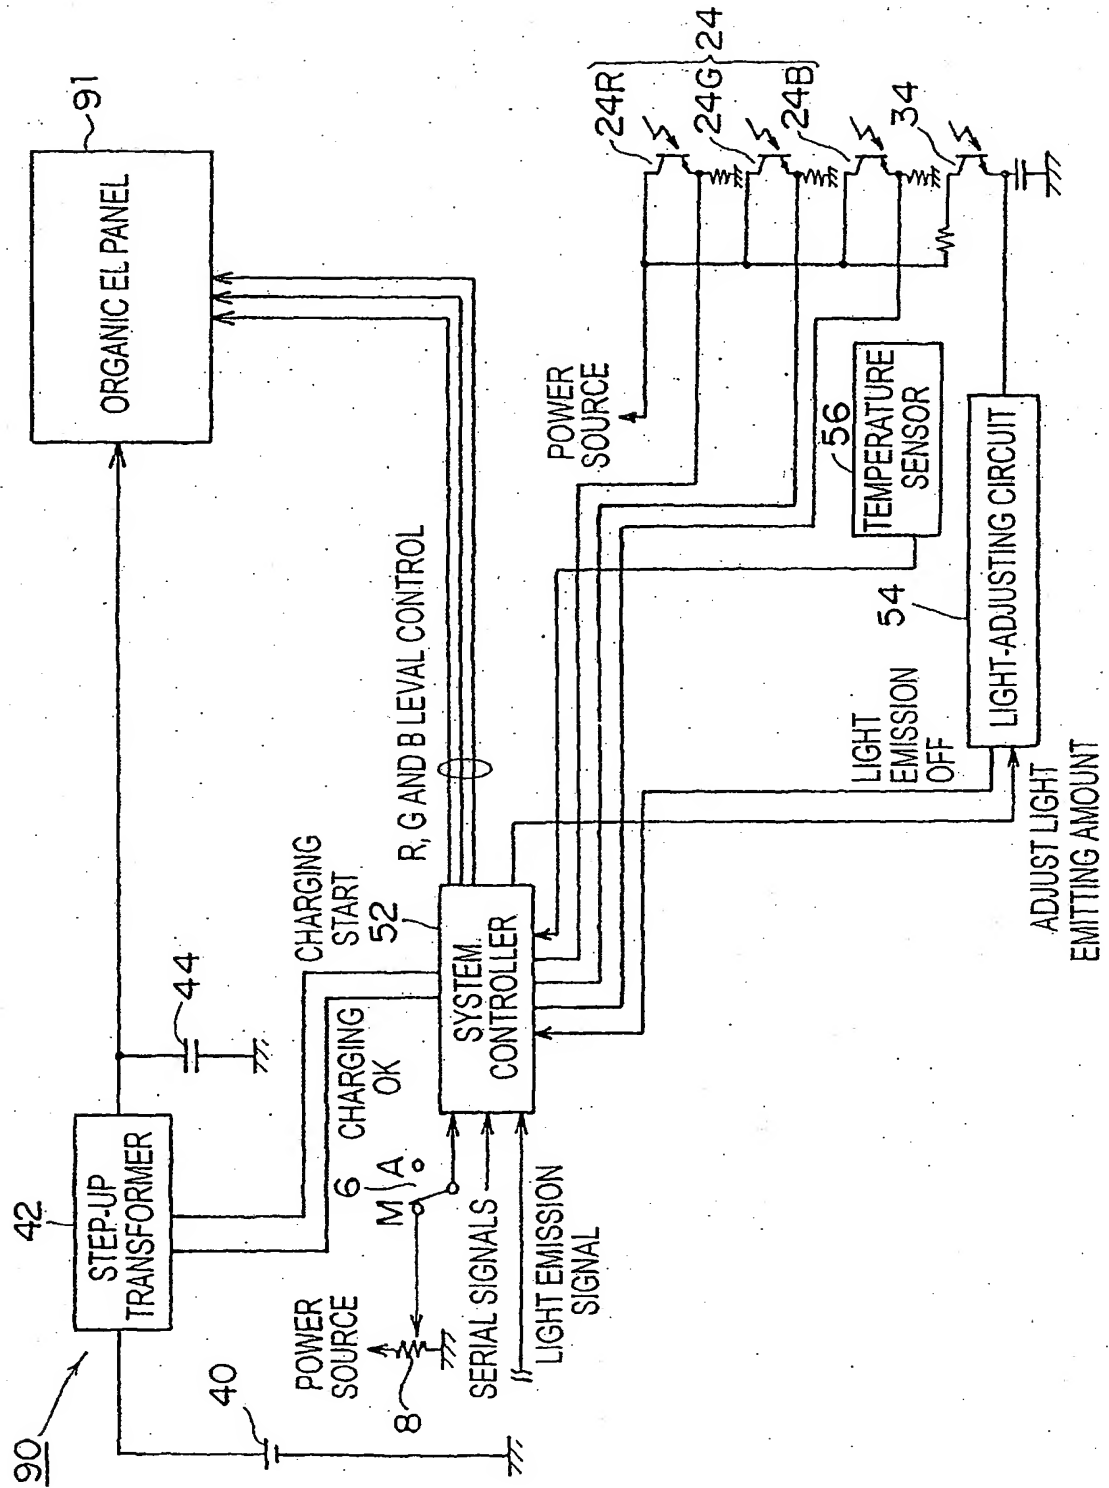


FIG. 11

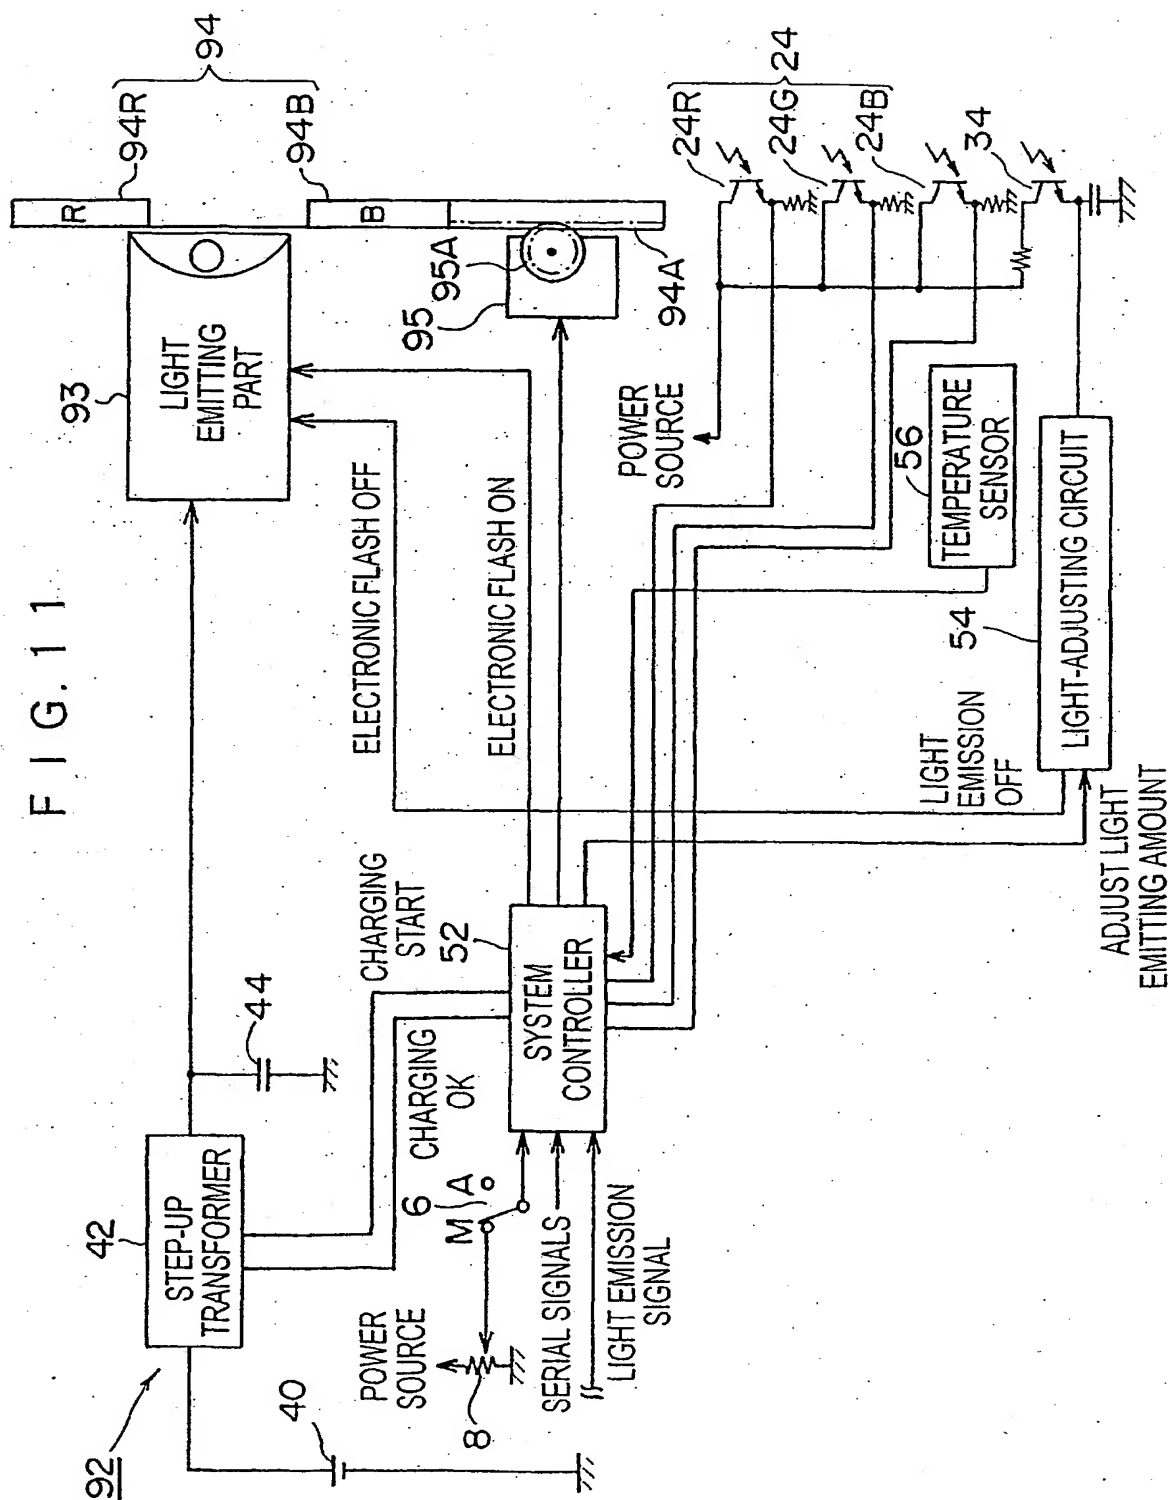


FIG. 12

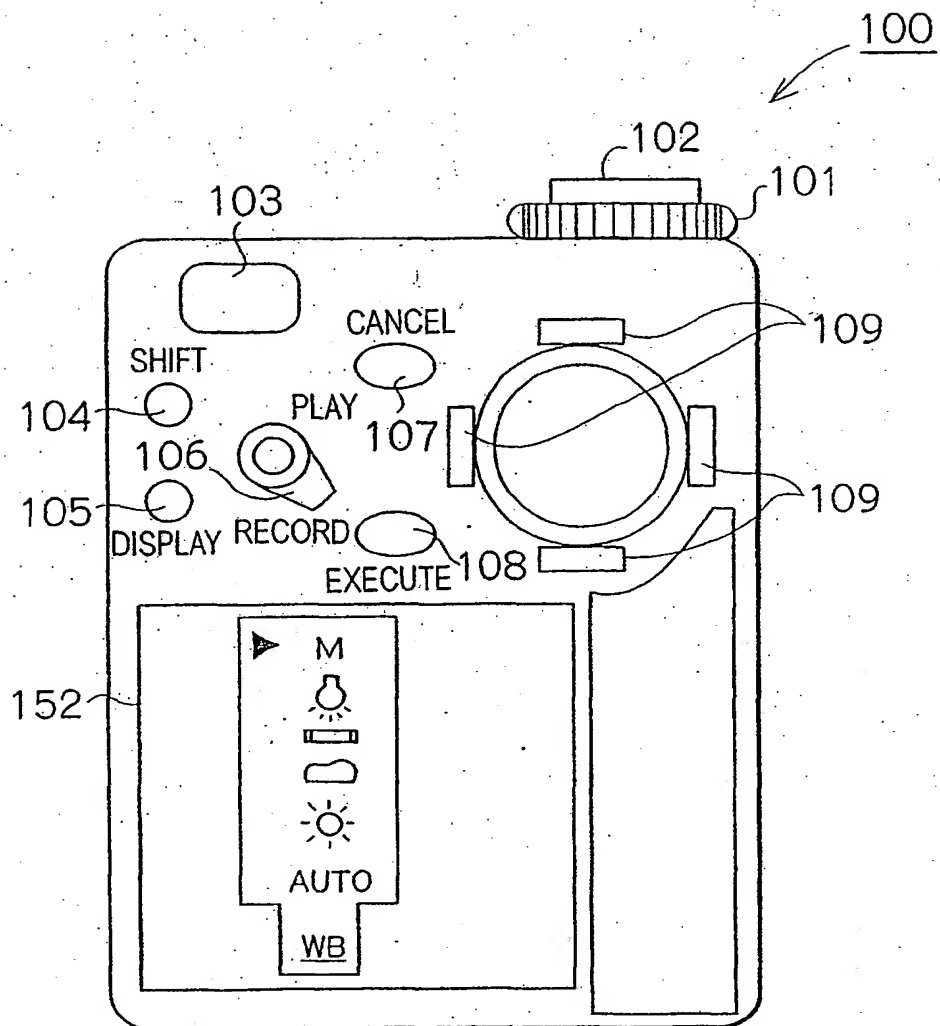


FIG. 13

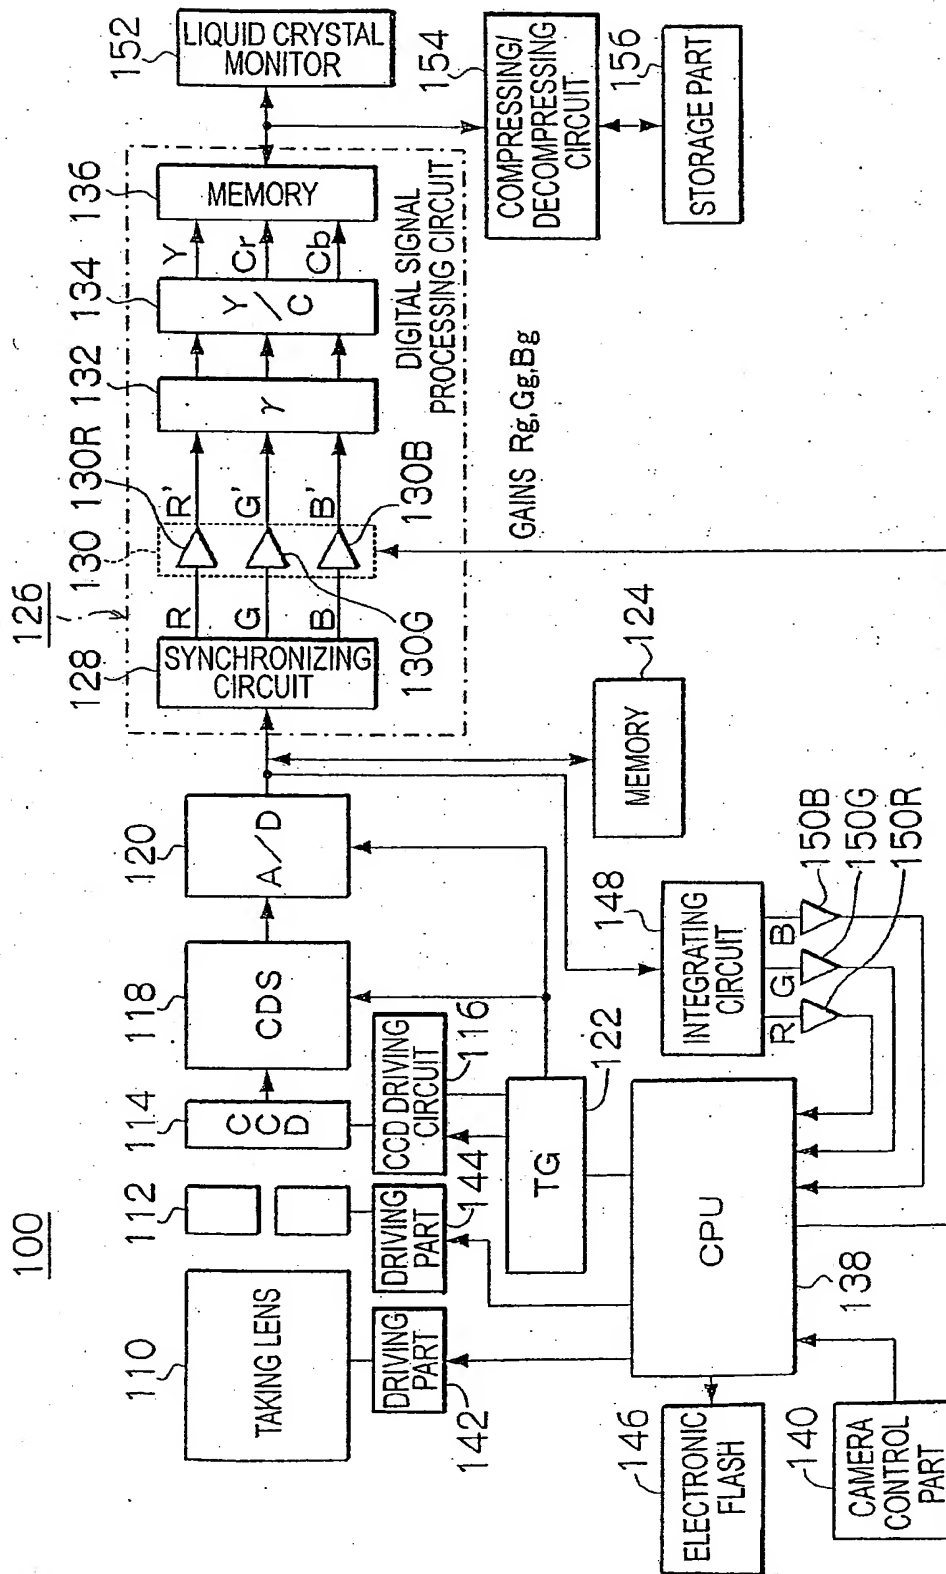


FIG. 14


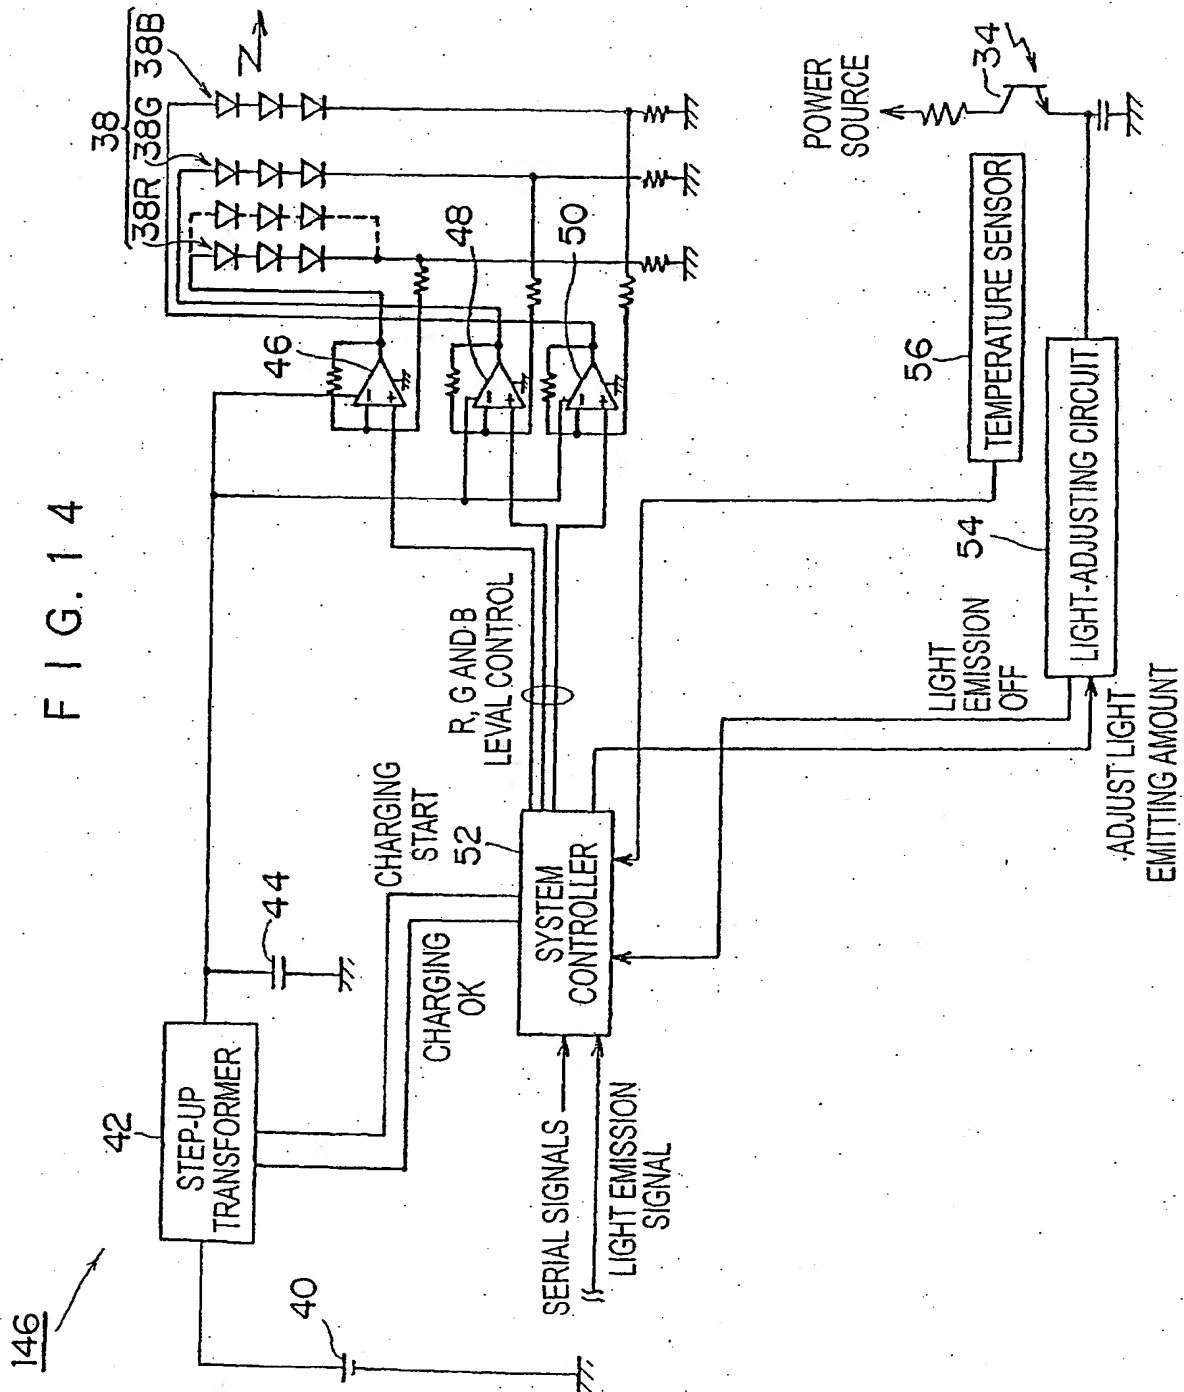


FIG. 15





(19)

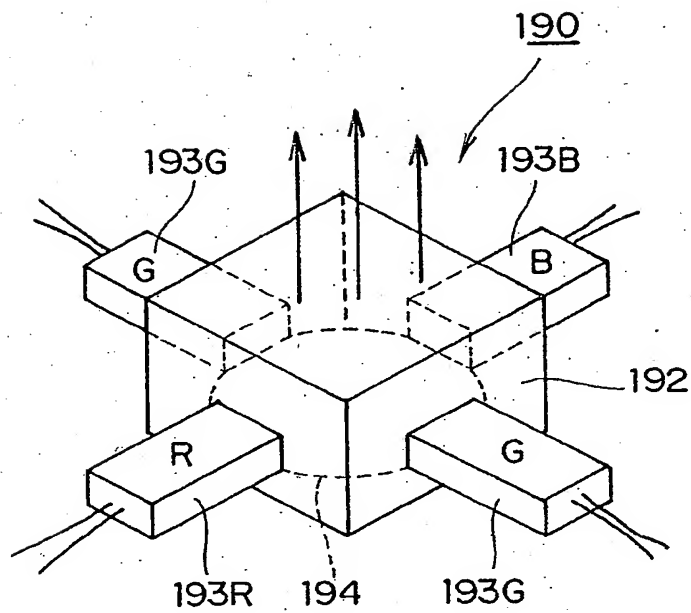

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 176 849 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
15.09.2004 Bulletin 2004/38

(51) Int Cl.7: H05B 33/08, G03B 15/03

(43) Date of publication A2:  
30.01.2002 Bulletin 2002/05

(21) Application number: 01306288.0

(22) Date of filing: 23.07.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(71) Applicant: Fuji Photo Film Co., Ltd.  
Kanagawa-ken (JP)

(72) Inventor: Kawakami, Chikuni  
Asaka-shi, Saitama (JP)

(30) Priority: 25.07.2000 JP 2000223505  
11.07.2001 JP 2001210598


(74) Representative: Stevens, Jason Paul et al  
Frank B. Dehn & Co.  
179 Queen Victoria Street  
London EC4V 4EL (GB)

(54) Electronic flash, electronic camera and light emitting head

(57) R, G and B LEDs (38R, 38G and 38B) are used as a light source of an electronic flash. Electric energy is supplied to a capacitor (44) to the LEDs (38R, 38G and 38B). A system controller (52) controls light emitting amounts of the LEDs (38R, 38G and 38B) so that a color

temperature of the electronic flash light becomes a color temperature that has been manually set with a color temperature setting switch (28) or a color temperature of a light source determined by color temperature sensors (24).

FIG. 4

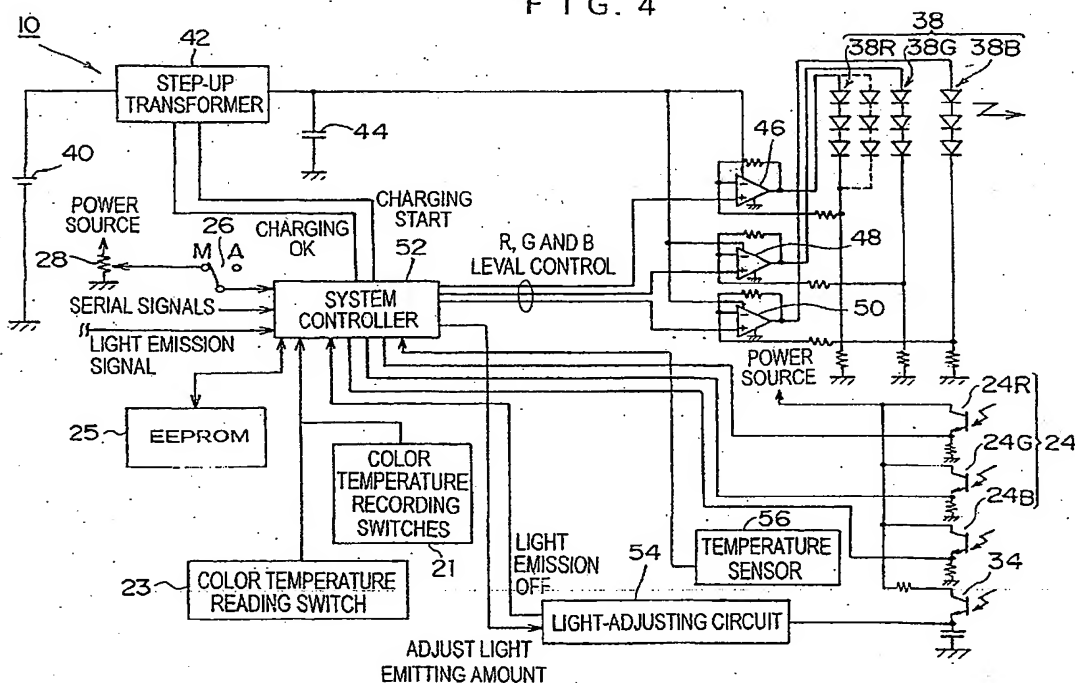



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 6288

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 895 128 A (HAMADA MASATAKA ET AL) 20 April 1999 (1999-04-20)	1-4, 7, 8, 12, 13, 16-18, 27	H05B33/08G03B15/ H05B33/08 G03B15/05 G03B15/03 H05B41/32
Y	* column 5, lines 4-15 * * columns 8-13; figures *	9-11	
X	DE 298 05 743 U (BUECHNER THOMAS) 24 December 1998 (1998-12-24) * the whole document *	1, 2	
Y	US 5 109 248 A (PETRAKOS STEPHANIE ET AL) 28 April 1992 (1992-04-28) * column 5, line 45 - column 6, line 68; figure 1 *	9-11	
X	US 6 081 076 A (OGAWA KIMIAKI) 27 June 2000 (2000-06-27) * column 2 *	23-26	
A	US 4 485 336 A (ISHIKAWA NORIO ET AL) 27 November 1984 (1984-11-27) * abstract *	22	
A	US 5 666 571 A (MATSUMURA KOICHI) 9 September 1997 (1997-09-09) determining color temperature of the incoming light col. 4 l. 20-24		TECHNICAL FIELDS SEARCHED (Int.Cl.7)  H05B G03B
A	DE 40 11 842 A (FRAUNHOFER GES FORSCHUNG) 17 October 1991 (1991-10-17)		
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 2 July 2004	Examiner Maicas, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P/C/C01)



European Patent  
Office

Application Number

EP 01 30 6288

### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):

☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.

☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.

☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:

☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent  
Office

**LACK OF UNITY OF INVENTION**  
**SHEET B**

Application Number  
EP 01 30 6288

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-6

An electronic flash unit comprising:

- a flash light source comprising a LED and
  - a control device which supplies electric energy to said LED.
- 

2. claims: 7-22

An electronic flash unit comprising:

- a flash light source and
  - an adjusting device that adjust the color temperature of the light emitted by the flash light source.
- 

3. claims: 23-26

An electronic color camera comprising:

- an electronic flash light;
  - an automatic white balance correcting device;
  - a color temperature determining device and
  - an adjusting device that adjust the color temperature of the flash light.
- 

4. claim: 27

Light emitting head comprising:

- an optical member with a mirror and
  - a light emitting array provided on a side of the optical member so that the light is emitted through the top of the optical member.
-

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 6288

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-07-2004

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5895128	A	20-04-1999	JP	10206942 A	07-08-1998
DE 29805743	U	24-12-1998	DE	29805743 U1	24-12-1998
US 5109248	A	28-04-1992	US	4978892 A	18-12-1990
			CA	2001953 A1	27-06-1990
			DE	375963 T1	18-10-1990
			EP	0375963 A2	04-07-1990
			JP	2226651 A	10-09-1990
US 6081076	A	27-06-2000	JP	3340486 B2	05-11-2002
			JP	6175202 A	24-06-1994
			JP	3193504 B2	30-07-2001
			JP	6214292 A	05-08-1994
			DE	4328949 A1	14-04-1994
			FR	2695217 A1	04-03-1994
			GB	2270751 A ,B	23-03-1994
			GB	2305312 A ,B	02-04-1997
			GB	2305260 A ,B	02-04-1997
			JP	3417613 B2	16-06-2003
			JP	6308586 A	04-11-1994
			JP	3367498 B2	14-01-2003
			JP	2000221570 A	11-08-2000
			US	5485201 A	16-01-1996
			US	5712535 A	27-01-1998
			US	5838369 A	17-11-1998
			US	5978022 A	02-11-1999
			US	5909245 A	01-06-1999
			US	6072281 A	06-06-2000
			US	5896014 A	20-04-1999
			JP	3360754 B2	24-12-2002
			JP	6301087 A	28-10-1994
			JP	3345126 B2	18-11-2002
			JP	6301089 A	28-10-1994
			JP	3360755 B2	24-12-2002
			JP	6301088 A	28-10-1994
US 4485336	A	27-11-1984	JP	1777728 C	28-07-1993
			JP	4062056 B	05-10-1992
			JP	58149033 A	05-09-1983
			DE	3307369 A1	08-09-1983
			GB	2120403 A ,B	30-11-1983
US 5666571	A	09-09-1997	JP	2858430 B2	17-02-1999
			JP	6308581 A	04-11-1994

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 6288

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-07-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 4011842	A	17-10-1991	DE 4011842 A1	17-10-1991
			WO 9116786 A1	31-10-1991

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82